


Technical data

220g/m² - 2 sides coated

GRIP
SHEET®

TEST	UNIT	NORM	VALUE	SPECIFICATIONS
■ Weight final product	g/m ²	NF EN ISO 536, 1996	241	239 - 249
■ Thickness	µm	NF EN ISO 534, 2005	418	398 - 438
BREAKING STRENGTH IN TENSION				
■ Resistance	kN/m	NF EN ISO 1924.2, 1995	SM	10,3
			ST	4,4
■ Rupture length	meters		SM	4346
			ST	1869
■ Elongation	%		SM	1,6
			ST	2,4
■ Burst Index	kPa	NF EN ISO 2758, 2004	388	
■ Friction coefficient	°	NF Q 03-083,1993	SM	53
■ air porosity	cm ³ /m ² .Pas	NF ISO 5636.3, 1992		16
■ toxicity				None
■ Skin irritation				None
■ Reuse		NF EN 13429		Yes
■ Recyclability				Yes

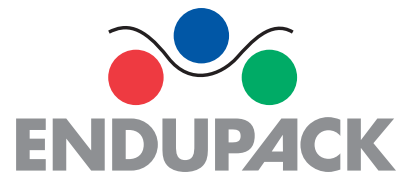

**ENDUPACK**

- Pallet quantity = 3,000 sheets
- % of tolerance : 2%
- Warehousing conditions: Insensitive to heat/cold